

# Combining Visualization and Statistical Analysis to Improve Operator Confidence and Efficiency for Failure Detection and Localization

Peter Bodík<sup>‡</sup>, Greg Friedman<sup>†</sup>, Lukas Biewald<sup>†</sup>, Helen Levine<sup>§</sup>, George Candea<sup>†</sup>,  
Armando Fox<sup>†</sup>, Michael I. Jordan<sup>‡</sup>, David Patterson<sup>‡</sup>

<sup>‡</sup>UC Berkeley, <sup>†</sup>Stanford University, <sup>§</sup>Ebates.com

## Abstract

*Web applications suffer from software and configuration faults that lower availability. Recovering from failure is dominated by the time interval between when these faults appear and when they are detected by site operators. We introduce a set of tools that augment the ability of operators to perceive the presence of failure: an automatic anomaly detector scours HTTP access logs to find changes in user behavior that are indicative of site failures, and a visualizer helps operators rapidly detect and diagnose problems. Visualization addresses a key question of autonomic computing of how to win operators' confidence so that new tools will be embraced. Evaluation performed using HTTP logs from Ebates.com demonstrates that these tools can enhance the detection of failure as well as shorten detection time. Our approach is application-generic and can be applied to any Web application without any instrumentation.*

## 1. Introduction

Web applications are becoming increasingly complex and hard to manage. In particular, non-failstop application-level faults that cause user-visible failures are hard to detect without special case checks, yet they have a first-order impact on the user's experience that may result in temporary or permanent site abandonment. As much as 75% of time spent recovering from these failures is spent just detecting them [4]. Although a new focus on statistical anomaly detection and pattern recognition [10] promises to reduce the manual configuration and tuning required by current monitoring tools, statistical techniques invariably suffer from false positives (and sometimes false negatives), reducing the operator's confidence in the monitoring system.

Rather than ignoring this fundamental trust issue and removing the human from the loop, we believe a more promising path is an operator-aware division of labor for detecting such failures. To the computer we assign what the computer

does best: statistical analysis of log data. For the human operator, we provide a tool to help bring her system experience and expertise to bear on interpreting and reacting to the alarms raised by the analysis engines; specifically, we provide rich visualizations of traffic information that allow her to quickly spot the sources of potential problems and to cross-check the reports of the statistical analysis tools. By taking advantage of the fact that human beings are excellent performers at visual pattern recognition, visualization helps the operator interpret failure alarms and identify their possible causes as well as keeping the effective cost of false alarms low by allowing her to rapidly identify them as such.

In determining what kind of analysis to perform on site logs, we observe that the site's end users are excellent "detectors" of site failures, in that their behavior typically changes when they encounter a malfunction. For example, if the link from the `/shopping_cart` page to the `/checkout` page is broken, users simply can't reach the `/checkout` page. Similarly, if a particular page does not load or render properly, users might click "Reload" several times to try to fix the problem. Since such behaviors are captured in the HTTP logs, we can build statistical models of normal access patterns and then detect anomalies in user behavior. Since HTTP logs are application-generic, our approach can be applied to other Web applications without additional instrumentation.

## Contributions

We present a visualization tool that allows operators to quickly spot anomalies or possible problems on their site in real time as well as confirm or investigate problem alarms reported by automated detection systems. To illustrate the latter ability, we apply some relatively well-known anomaly detection techniques to spot non-failstop failures in server logs from a real mid-sized Internet site; the basic insight is to look for anomalous patterns in end-users' behavior as possible indicators of a failure. The information from these anomaly detectors is fed to the visualization tool, allow-

ing the operator to visually inspect the anomaly in the context of previous and current traffic patterns and correlate the anomaly-score information to the traffic timeline. Unlike traditional visualization systems whose structure often reflects the architecture of the system, our tool visualizes metrics derived from users' site-visit behavior, which the site operators can more readily understand. We find that the use of the combined visualization and analysis tools would have allowed Ebates operators to detect and localize many actual site problems hours or days earlier than they actually did.

We make the following specific contributions:

- We use information-rich visualization to address the problem of operator trust in statistical learning algorithms. The synergy of visualization and automatic detection allows an operator to use *human pattern matching* to easily verify the warnings produced by our monitoring system.
- We monitor user behavior to detect situations where the site is available but individual applications or functionalities are beginning to fail. These were often early indicators of upcoming problems for the whole site.
- Visualization of information was not based on systems architecture, which is the norm, but on metrics based on “black-box” user behavior. These user-oriented metrics both offer greater insight into the status of the site and match our statistical algorithms. This match builds the trust relationship. Since our approach uses just HTTP logs to monitor user behavior, it can be used with any Web application.
- We applied automatic detection of anomalies that allowed us to quickly detect and help localize application-level failures from a real system: Ebates.com.
- We argue that some traditional evaluation metrics such as time-to-detect are difficult to interpret in real-world situations. In the absence of exhaustive ground-truth data concerning the exact time a failure was introduced, or the ability to exactly classify a particular incident as a failure rather than a temporary (if undesirable) anomaly, “time to detect” and “true positive rate” become more subtle to measure. We anticipate that this will be a fundamental problem when working with real-world failure data, and we present alternative evaluation metrics based on the amount of advance warning provided by our tools relative to existing detection techniques used at Ebates.

Section 2 outlines our approach to combining visualization with automatic statistical anomaly detection. Section 3 describes the details of the algorithms themselves, our experimental setup and methodology, and evaluation metrics.

Section 4 presents the results of applying our tools to real datasets, concentrating on the relative strengths and weaknesses of the different algorithms and the use of visualization to allow the operator to rapidly bring her experience and judgment into play to resolve ambiguities in failure reporting across the different algorithms. Section 5 discusses salient aspects of our results in light of our goal—helping the operator work more efficiently with automated detection techniques—and draws some tentative conclusions about implications for continuing work in this area. We then review some related work, outline possible future directions, and conclude.


## 2. Approach: Combining Anomaly Detection and Visualization

Our anomaly detection approach is relatively simple: we chose to look for abrupt changes in hit frequencies to the top 40 pages at a site. Fundamentally, this problem involves learning a baseline of hit frequencies, detecting deviations (anomalies) from that baseline, and determining the extent to which a “long lived” anomaly should influence the baseline (i.e., the sensitivity with which the baseline itself shifts in response to recent and/or anomalous data). Furthermore, when an anomalous frequency shift is detected, we need to *localize* the problem, i.e. determine which page(s) are most likely implicated as causing the anomaly.

To perform this analysis we use two statistical methods: Naive Bayes classification and the  $\chi^2$  (Chi-square) test. (The details of these algorithms are described in section 3). Other anomaly detection methods such as Support Vector Machines may perform better, but they don't allow us to easily determine which pages are the most anomalous. On the other hand, both Naive Bayes and  $\chi^2$  allow to quantify the anomaly for each page.

While these techniques are useful for their ability to identify patterns in large amounts of data, as Hamming has said, “The purpose of computation is insight, not numbers.” So we augment the tools with *information visualization*, “the use of computer-supported, interactive, visual representations of abstract nonphysically-based data to amplify cognition”, which has been shown to reduce the mental effort required to do search, recognition, and inference in connection with problem solving (see the first chapter of [2] for numerous examples).

The tool we built provides a compact and information-rich visual representation of: a) traffic to the 40 most requested pages, and b) transitions from and to these top 40 pages in user sessions. Figure 1 shows a screenshot of the main visualization interface of the tool. Instead of simply reporting detected anomaly at 3:25pm, the operator can immediately see the historic and current traffic patterns

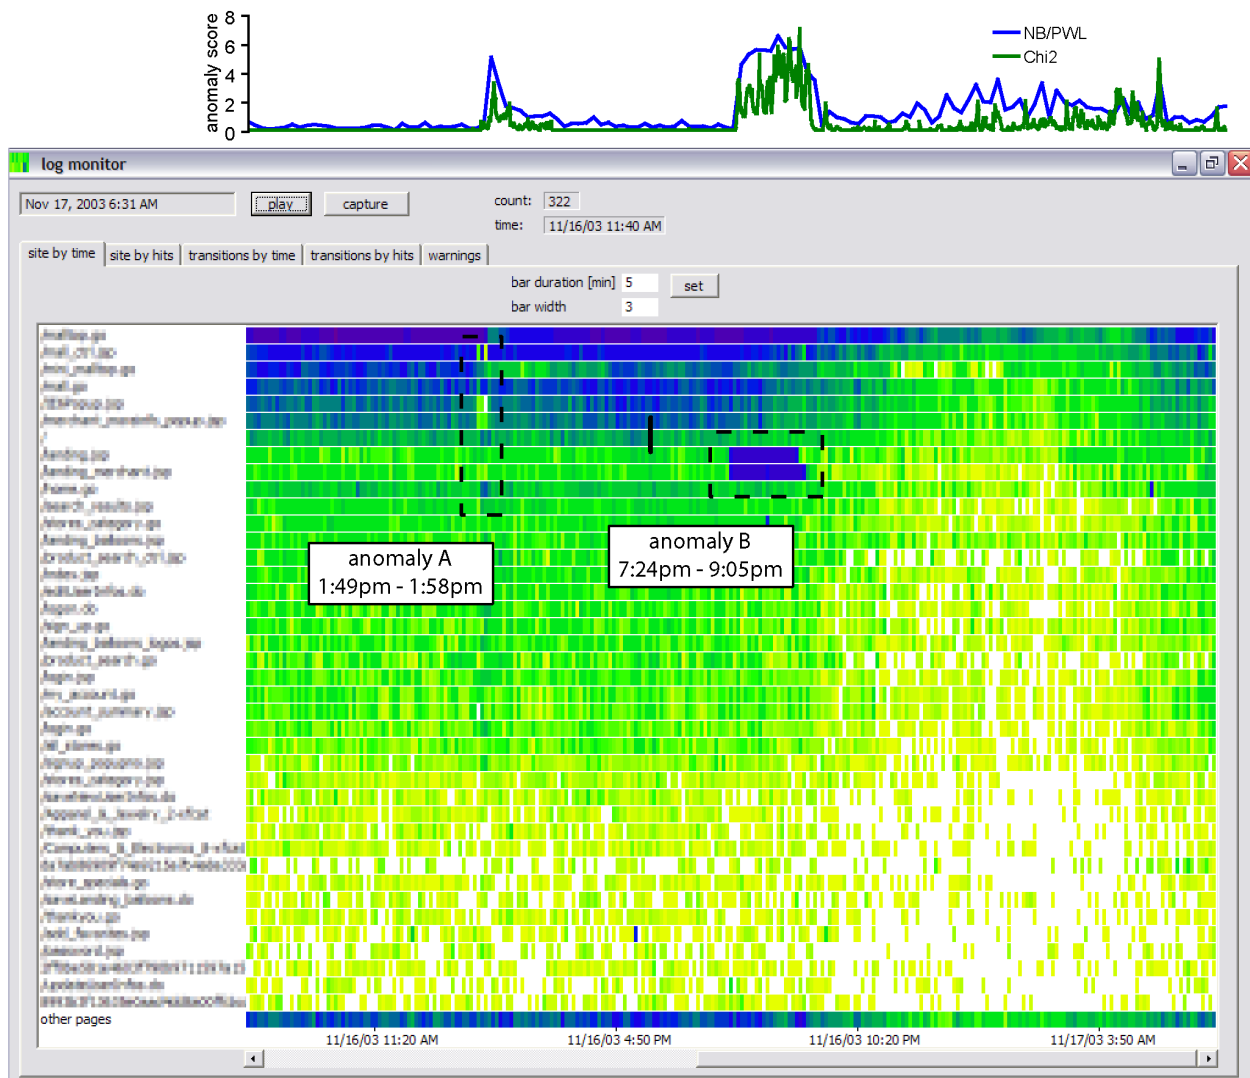


**Figure 1.** An annotated screen shot of the visualization tool. (Note: if this paper was printed in black-and-white, please see the hi-res color figures at <http://www.cs.berkeley.edu/~bodikp/icac05/>. Color is an integral component of the visualization.) The horizontal axis is time in 5-minute intervals. Each horizontal bar represents the hit count to one of the 40 most-requested pages; the bottom bar counts hits to all other pages combined. A blue tile means the corresponding page received > 100 hits during that 5-minute interval; green > 10 hits, yellow > 1 hit, white (no tile) zero hits. The graph on the top shows the corresponding anomaly scores. In this screenshot we clearly see two anomalies from data set 1: A (1:49pm to 1:58pm) and B (7:24pm to 9:05pm).

to confirm the anomaly. The tool also provides a simple interface for manual inspection of traffic patterns.

The emphasis on “live” interaction with the data distinguishes visualization from static graphical presentation. In our case, the operator can drill down on one of the visually-obvious traffic anomalies in Figure 1 to examine the page-transition rates during the anomalous interval, as shown in Figure 2.

The anomaly detection algorithms mentioned previously also feed information to the visualization tool. As we will describe, the algorithms report about once a minute on whether anomalous behavior was detected during that minute. To avoid bombarding the operator with alarms for anomalies that persist over several minutes, consecutive anomalies after the first are grouped into a single warning. If at least 10 consecutive anomaly-free

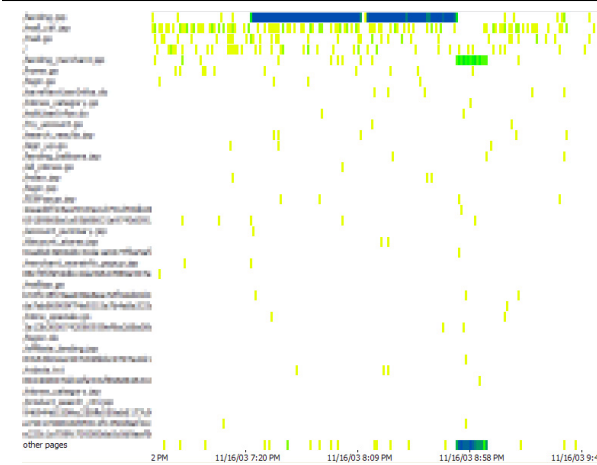

**Figure 2. Page transitions from /landing\_merchant.jsp page during the anomaly B in data set 1, in 1-minute intervals. This represents an alternate view of part of the time period From figure 1.**

intervals are seen, the most-recently-seen warning is assumed to cease at the first of those intervals, and the next anomaly to be detected will trigger a new warning. In addition, for each warning the tool reports the top 10 most anomalous pages, as scored by the anomaly detection algorithms, and the change in transition rates to and from the most anomalous page; this information may help the operator localize the cause of the problem. For example, if the operator clicks on the “Warnings” tab in Figure 1 after selecting the anomaly marked as B in the figure, the Warning panel will display the following:

```
warning #2: detected on Sun Nov 16 19:27:00
start: Sun Nov 16 19:24:00 PST 2003
end: Sun Nov 16 21:05:00 PST 2003

anomaly score = 7.03

Most anomalous pages:      anomaly score:
/landing.jsp              19.55
/landing_merchant.jsp     19.50
/mall_ctrl.jsp            3.69
...etc...

change in transitions FROM /landing.jsp
page:      before:  after:
/landing_merchant.jsp  37.13%  93.17%
/mall_ctrl.jsp         21.85%   0.83%
...etc...
```

### 3. Test Data and Methodology

In this section we describe the real HTTP logs we analyzed, give details of the analysis algorithms, and describe our evaluation methodology before proceeding to experimental results.

#### 3.1. HTTP Access Logs

A typical three-tier Internet application consists of a tier of Web servers, a tier of application logic servers, and a tier of persistent storage servers. Popular Web servers include Apache and Microsoft IIS; application servers may be framework-based, such as Java 2 Enterprise Edition (J2EE) servers, or custom-written in-house; persistence may be provided by a database such as Oracle or MySQL or by a file server.

Ebates.com provided us with 5 sets of (anonymized) access logs recorded by the Web server tier. Each set consisted of a random sample (approximately 40%) of HTTP traffic to the site during a contiguous time period ranging from 7 to 16 days. Each period contains at least one web application failure as well as significant intervals of “normal” application behavior. The access logs contained the following information about every user request: Apache server’s time stamp, local URL of page accessed, URL parameters (parts of the URL passed as parameters to scripts on active pages), session ID, application server that served the request, and anonymized user ID.

#### 3.2. Analysis Using $\chi^2$ -test

Intuitively, we might expect that under normal conditions, vectors of page hit counts collected during different time intervals should come from the same distribution, or more generally, a vector of hit counts collected during the current time interval should come from the same distribution as the “historical norm.” The  $\chi^2$ -test [12] can be used to compute the probability that two data vectors  $A = (a_1, \dots, a_n)$  and  $B = (b_1, \dots, b_n)$  come from different distributions; it has been used, e.g., to detect anomalies in network traffic [14].

The test is performed in the following way:

1. Let  $S_a = \sum_{i=1}^n a_i$ ,  $S_b = \sum_{i=1}^n b_i$ , and  $s_i = a_i + b_i$ .
2. Compute the *expected value* for each  $a_i$  and  $b_i$ :  $E_i^A = s_i S_a / (S_a + S_b)$ ,  $E_i^B = s_i S_b / (S_a + S_b)$ .
3. Compute the total  $\chi^2$  value of the two vectors:  $\chi^2 = \sum_{i=1}^n (a_i - E_i^A)^2 / E_i^A + (b_i - E_i^B)^2 / E_i^B$ .
4. Compute the significance  $s$  of the test using the  $\chi^2$  distribution with  $n - 1$  degrees of freedom.
5. Finally, an anomaly score is computed as  $-\log(1 - s)$ .

From the access logs, we first identify the  $N$  most popular (by hit count) pages of the site (we used  $N = 40$ ). We compute the vector  $C = (c_1, \dots, c_{40})$  of hit rates to each of these pages during the current time interval and compare it to the “historically normal” vector  $H = (h_1, \dots, h_{40})$  of hit rates for those same pages. Since different types of traffic anomalies may take different amounts of time to become evident, we consider time intervals varying in length from 1 to 20 minutes. Also, we exclude all pages that didn’t receive at least 5 hits during the specified time interval, since this is a condition for the validity of the  $\chi^2$  test. The actual algorithm, run once per minute, is as follows (let  $t$  be the current time):

1. compute the historic traffic pattern  $H$  over all previous data, *excluding* time intervals marked as anomalous. (Initially, we assume all intervals are normal.)
2. for every  $t_0 \in \{1, 2, \dots, 20\}$ :
  - (a) compute current traffic pattern  $C$  from time interval  $\langle t - t_0, t \rangle$
  - (b) compare  $C$  and  $H$  using the  $\chi^2$ -test. If the significance of the test is higher than 0.99, mark the interval  $\langle t - t_0, t \rangle$  as anomalous.

When a period is declared anomalous, we assign an anomaly score to each page based on that page’s contribution to the total  $\chi^2$  value:  $((c_i - E_i^C)^2 / E_i^C + (h_i - E_i^H)^2 / E_i^H)$ .

We also detect significant changes in page transitions that occurred when the anomaly started. We compare the traffic *before the anomaly* (time interval  $\langle t_0 - t, t_0 \rangle$ , where  $t_0$  is the start of the anomaly) and *during the anomaly* ( $\langle t_0, t_1 \rangle$ , where  $t_1$  is current time). Thus, for every minute of an anomalous traffic we compare the transitions to and from the top 40 pages before and during the anomaly using the  $\chi^2$ -test.

### 3.3. Analysis Using Naive Bayes Classifier

The second type of analysis involves training a Naive Bayes classifier [6] to detect anomalies. Again, we use the access logs to compute the hits per unit time to each of the top  $N$  pages on the site,  $(c_1, \dots, c_N)$ , during the current time interval. The  $c_i$ ’s are normalized by dividing by the total hit count during the interval so that they are in the range of 0 to 1. We also compute the combined hit frequency to all remaining pages on the site and the difference in total hit count between the previous time period and the current one. We therefore collect  $N + 2 = 42$  features, and as usual for Naive Bayes, we make the assumption that every feature is independent of every other feature.

We divide time into 10-minute time intervals and use this classifier to determine whether the current time interval is

*normal* ( $S = s^+$ ) or *anomalous* ( $S = s^-$ ). The conditional probability of each feature  $\mathbf{f}_i$  given  $S = s^+$  is modeled by a Gaussian distribution whose mean  $\mu_i$  and variance  $\sigma_i^2$  are estimated for each feature using maximum-likelihood estimation from the previous time intervals. If we knew *a priori* which time intervals were anomalous and which were normal (in the parlance of machine learning, if we had labeled data), it would be trivial to calculate the mean and variance of  $p(\mathbf{f}_j | S = s^+)$  and  $p(\mathbf{f}_j | S = s^-)$  using maximum likelihood estimation (MLE). However, as is typical for real systems, our data is unlabeled (i.e. we don’t know which periods are anomalous) so we have to do unsupervised learning. In the absence of labeled examples of  $s^-$ , we choose to model the conditional probability  $p(\mathbf{f}_j | S = s^-)$  using a uniform distribution over the range of possible values (i.e., 0 to 1).

The standard approach of using Expectation Maximization (EM) to simultaneously learn the value of  $s$  and  $p(\mathbf{f} | s)$  is too slow for real-time use on high-volume data, so we approximate it with two separate methods:

- Unweighted learning (NB/UWL): We estimate  $\mu_i$  and  $\sigma_i^2$  with the assumption that every previous time interval is *normal*, i.e. we “label” every previous interval as  $S = s^+$ . This is a reasonable first-order assumption as long as the majority of states are in fact normal, in other words, as long as failures are rare. However, if an anomaly occurs *and persists*, this technique will quickly “adjust” to the anomaly by treating it as normal. We therefore call this an “eager” learner.
- Probabilistically-weighted learning (NB/PWL): In estimating  $\mu_i$  and  $\sigma_i^2$ , we weight each past time interval by the probability that it is *normal*. Thus, the more anomalous a time interval appears, the less it is incorporated into the model of normal behavior. This method will continue to detect an anomaly even when it persists for a long time, but if the long-lived “anomaly” is in fact a new steady state, it will take longer for this method to adjust to it. We therefore call this a “careful” learner.

In our Naive Bayes approach, we don’t learn the prior probabilities of *normal* and *anomalous* time intervals. Instead, we use the priors as a parameter that trades off between a low false positive rate (for low  $Prob(anomalous)$ ) and a high anomaly detection rate (for high  $Prob(anomalous)$ ).

The classifier reports an anomaly score for each time period; this score is calculated as  $-\log(Prob(\mathbf{f} | normal)) / n$ , where  $n$  is the number of features used.

Note that in many cases, the judgment of whether a long-lived anomaly is in fact a new steady state may require operator intervention. Therefore, rather than trying to automatically determine this, we allow the operator to visualize both

the raw data and the anomaly scores over time reported by each algorithm.

**Localization** To localize the most likely features that caused the anomaly, we assign an anomaly score to each feature  $f_i$  as  $-\log(\text{Prob}(f_i|normal))$ . The top 10 most anomalous features are reported.

### 3.4. Methodology

The logs we received were collected in the past, and the failure incidents reflected in them had already been diagnosed and dealt with. Our methodology therefore consisted of the following steps:

1. With little or no knowledge of what events occurred in a data set, run our detection algorithms. For each data set, the models were initialized as untrained at the beginning of the data set and learned in an online fashion.
2. For each anomalous period (and some normal regions as well), show the traffic patterns during that period using our visualization tool in conjunction with the graphs of anomaly scores reported by our anomaly detectors.
3. Use the visualizations and graphs to discuss each reported incident with the CTO and operations engineers at Ebates to reconstruct “what really happened” during that incident as completely as possible.
4. Based on these discussions, classify each reported anomaly as either a true positive, a false positive (clearly attributable to a non-fault event, such as a failure-free update to the Web site), or a possible false positive (one we could not attribute to an event, or more often, that we could attribute but we could not unambiguously determine whether or not the associated event was a failure).
5. Based on these discussions, determine how much sooner a site failure could have been detected or prevented had our tools been in place at the time of the incident.

### 3.5. Evaluation Metrics

Traditionally, failure detection is evaluated in terms of precision and time-to-detection. Precision is defined as true positives divided by all positives, i.e.,  $TP/(TP + FP)$ , where true positives are the number of actual failures detected and false positives the number of identified events that are *not* failures. However, in dealing with real data from a complex service, these metrics are problematic.

First, part of the motivation behind our work is precisely that existing detection techniques *do not* detect certain kinds

of fail-stop failures. Hence, in cross-checking our results against the best knowledge available to the operations staff, we do not have 100% certainty that the list of known failures is exhaustive. Second, some false positives are attributed to non-fault events that result in a change in user behavior, or events that cause bona fide performance anomalies that are nonfatal under moderate load (for example) but lead to user-visible failure under heavier load. To be conservative, we count such incidents as “false positives” in our evaluation. Finally, the notion of “time to detect” presupposes that there exists an instant in time before which there was no failure and after which there was unambiguously a failure. For non-failstop failures, especially those that manifest only under increased load, it is unclear how to choose this moment. Furthermore, even if we could assume that the time of fault occurrence was well-defined, we lack the ground-truth knowledge to establish conclusively what that time was.

The information we do have includes the time a particular failure was in fact detected by existing techniques (whether automatically or manually by Ebates staff) and the ostensible cause of the failure (localization information) as determined by Ebates staff. When we measure true and false positives, then, we assume the best case corresponds to detecting all failures detected by Ebates staff and misclassifying no other events. We also measure advance warning—the amount of extra reaction time the staff would have had because our tool identified a potential failure before the staff did, and whether this advance warning might have helped mitigate or avoid a failure. Finally, we ask the question: had the staff been given the localization information provided by our algorithms, how useful would it have been in identifying the cause of the failure? In our measurements we report the qualitative answer, on a scale of 1 (not useful) to 10 (vitaly useful) given by Ebates staff. (We did not collect localization score data on one of our algorithms, NB/UWL.)


## 4. Discussion of Results for Each Data Set

In this section we discuss the results of combining anomaly detection and visualization on each of the datasets we examined. At the end we summarize the overall performance of our techniques, paying particular attention to the differences in each algorithm’s ability to detect particular failures, the role of visualization in helping the operator sort out “what really happened”, and the implication for combining both types of operator information.

### 4.1. Data Set 1: Account Page

The major problem that occurred during this week was a site slowdown (and then crash) caused by the *account page*. The bad account page had existed for a long time, but this



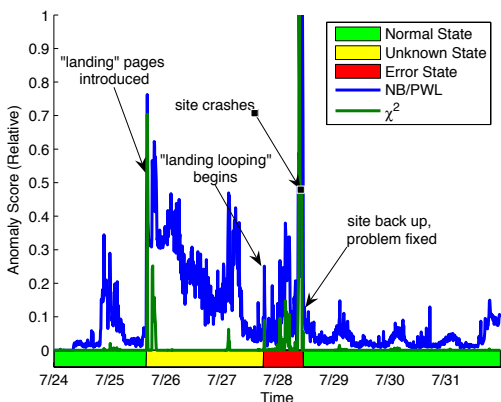


**Figure 5.** Anomaly scores over time for NB/PWL and  $\chi^2$  on data set 2, “Landing Loop”. The time period from the introduction of the landing pages until Ebates’ detection of the landing loop problem is marked as unknown, since we haven’t been able to determine with 100% certainty whether this time period was problematic for Ebates or not.

available in this case would have been helpful in diagnosing the cause of a poorly-understood performance problem and would have called attention to the account page problem an hour before it was identified.

## 4.2. Data Set 2: Landing Loop

This data set included a site crash due to a bug whereby a “landing page” (an entry page to the site) was incorrectly redirecting users back to the landing page itself, resulting in an infinite loop that eventually brought down the site. All 3 algorithms (NB/PWL, NB/UWL, and  $\chi^2$ ) detected significant anomalies 2 days prior to Ebates’ detection of a major problem and 2.5 days before the crash, corresponding to the introduction of two new “landing pages” to the site. (Note that the bug may have been introduced at this time or at a point in the future.) All 3 algorithms also detected significant (and increasing) anomalies in the site beginning several hours before the site crashed. NB/PWL and NB/UWL provided localization information that the CTO rated as an 8, on a scale of 1-10, for the usefulness this would have had in detecting and diagnosing the problem so as to avoid the crash.  $\chi^2$  had one (possible) false positive: the early detection  $2\frac{1}{2}$  days before the crash. NB/UWL and NB/PWL each had two (possible) false positives. According to the CTO, even if the initial detection  $2\frac{1}{2}$  days before the crash did not represent the onset of the major bug, the warning and localization information provided at that time would have been very helpful in diagnosing the problem when the major fail-

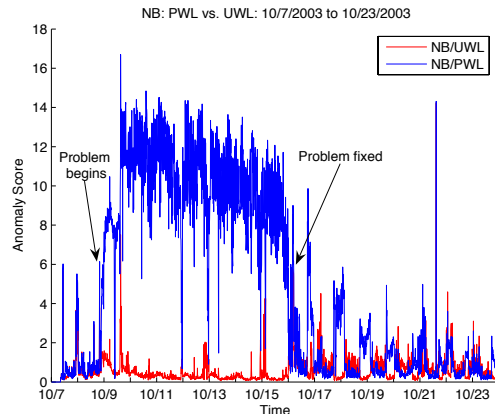

**Figure 6.** Whereas “careful learner” NB/PWL continues to detect the broken signup page anomaly (data set 3) for all 7 days, “eager learner” NB/UWL quickly decides that this new behavior is normal.

ure did start to occur.


Figure 5, which shows the anomaly scores over time for NB/PWL and  $\chi^2$ , illustrates the impact of careful vs. eager learning. At the introduction of the problematic pages, NB/PWL detects a significant change in the distribution of the traffic to the site. Because this raises the anomaly score significantly, NB/PWL weights this time period extremely low in incorporating it into its model of “normal”. Traffic characteristics to which NB/PWL is sensitive remain anomalous for the next two days, so NB/PWL is very slow to decide that this is in fact “normal” behavior. In contrast,  $\chi^2$  detects changes in traffic patterns over relatively short time periods. Similarly, as shown in Figure 6 (which represents data set 3), the “eager learner” NB/UWL quickly concludes that the new behavior is normal, but for a different reason, namely its assumption that the behavior of all previous time periods should contribute equally to the profile of “normal” behavior.

## 4.3. Data Set 3: Broken Signup

This data set does not contain a crash, but rather an incomplete deployment of a “new user sign up” page which had gone undetected by Ebates operators. Served to new users for over a week, this page displayed a blank page with an error on it instead of the expected site content, rendering it impossible for new users to come to the site. The problem did not affect existing users.

NB/PWL and  $\chi^2$  detected the introduction of the problem 7 days before Ebates’ diagnosis. (NB/UWL detected an anomaly at this time too, but it was close to its noise threshold, so we do not count this as a detection for NB/UWL.)



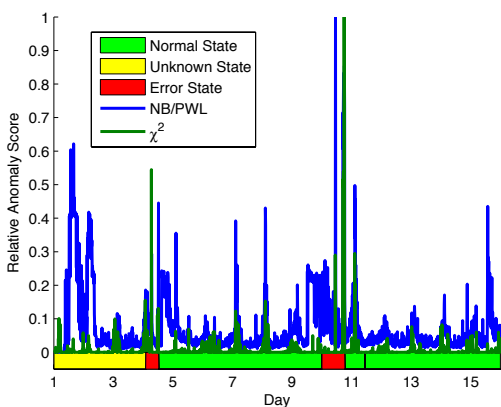

**Figure 7. Anomaly scores over time for NB/PWL and  $\chi^2$  on data set 5, “Bad URL and Runaway Query”. The major failures occurred on days 4 and 10.**

NB/PWL provided localization information at problem introduction time, and during the entire 7 day anomaly, that Ebates said would have been extremely helpful in localizing the problem. Because of the length of the anomaly, NB/UWL and  $\chi^2$  began to view the anomalous period as normal, but NB/PWL (the “careful learner”) continued to report an anomaly for the entire 7 days, as seen in Figure 6. This is another example of a case in which the operator’s understanding of the system would help resolve the ambiguous result of applying algorithms that are sensitive to different timescales.

#### 4.4. Data Set 4: Badly Optimized Page Bug

In data set 4, a new page that invoked an inefficient database query caused a site crash when its hit rate increased as a result of a large email campaign. The resulting database overload subsequently led to site failure. NB/PWL and NB/UWL detected the anomaly 4.5 hours before the crash (3 hours before Ebates staff detected the problem). The anomaly level was initially low, increasing as the problem escalated.  $\chi^2$  detected the problem 3 minutes *after* Ebates staff detected the problem. Ebates staff believe they could have avoided the crash if they had had the anomaly localization information provided by NB/PWL.

#### 4.5. Data Set 5: Bad URL and Runaway Query

Data set 5 contained 2 significant failures. The first failure due to a configuration error in which the ‘shopping url’ for one of Ebates’ merchants was inadvertently mapped to a popular search engine site. All Ebates users who followed

that link were instead sent back to Ebates where shopping sessions were generated continuously and in rapid succession until the site crashed.

$\chi^2$  detected this failure 5.5 hours before Ebates could diagnose the problem. Both NB algorithms detected the problem at the same time, but the anomaly scores were within the noise level, so we don’t count this in our results as a detection for these algorithms. However, once again Ebates staff said the localization information provided by the NB algorithms would have been a tremendous diagnostic aid.

The second significant failure was a runaway query causing significant database performance problems. All three algorithms detected this failure concurrently with Ebates’ detection. Figure 7 illustrates our algorithms’ behavior over this data set.

### 4.6. Summary of Results

Table 1 summarizes the overall results of our analysis. For five of the six major faults in our log data, at least one of the algorithms both detected the problem and provided useful localization information before Ebates was able to diagnose the problem; the sixth was detected concurrently with its occurrence. Our algorithms performed less well on the seven minor faults (four database alarms, one brief outage associated with a code push, one brief re-introduction of a buggy page, and one massive QA effort on the live site to verify a fix). Of the three missed faults (false negatives), two were database alarms that may not have had any discernible impact on users and the third was a brief introduction and then removal of a buggy page. The three known false positives that were all failure-free code updates to the application. Note that we did not consider the predictable nightly anomalies as false positives, since they were easily filtered out by time. We did not perform localization or advance-warning analysis on the minor faults.

Table 2 summarizes our results broken down by data set. For each data set we show number of major and minor faults detected (out of the total number of total major and minor faults respectively); number of known false positives and possible false positives; the advance warning time (AWT) for major faults, i.e. how long from the time our algorithms detected an anomaly until Ebates’ initial localization of the related fault; and the localization score, the usefulness of diagnostic information as estimated by Ebates staff on a scale of 1 to 10, lowest to highest, for the major faults. In data set 2 we are not certain whether if that detection represents the actual onset of the problem (see section 4.2); if not, the detection in this data set was approximately concurrent with Ebates’ detection.

Major fault	NB/PWL	NB/UWL	$\chi^2$
Faults Detected	5/6	4/6	6/6
Known FP's	1	1	1
Possible FP's	3	3	1
Detection rate	83%	67%	100%
Precision	56-83%	50-80%	67-86%
Local. score	8.6/10	n/a	4/10

Minor faults	NB/PWL	NB/UWL	$\chi^2$
Faults detected	4/7	4/7	4/7
Known FP's	3	3	0
Possible FP's	4	4	2
Detection rate	57%	57%	57%
Precision	36-57%	36-57%	67-100%

**Table 1. Summary of our results over all 5 data sets. For major faults,  $\chi^2$  had a higher detection rate and fewer false positives than NB/PWL or NB/UWL, but NB/PWL provided more useful diagnostic information.**


Measure	DS1	DS2	DS3	DS4	DS5	Total
Major faults	1/1	1/1	1/1	1/1	2/2	6/6
Minor faults	3/5	0/0	1/1	0/0	0/1	4/7
Known FP's	0	0	1	0	0	1
Possible FP's	0	0	1	1	1	3
AWT	1h	50h?	7d	0m	5.5h,0m	avg: 37h
Local. score	8	8	9	10	8	avg: 8.6

**Table 2. Performance by data set, using  $\chi^2$  for detection and NB/PWL for localization.**

## 5. Discussion: Role of the Operator

### 5.1. Classifying False Positives

In our experience, support from operations staff is essential for asserting the ground truth of a warning system. In our case, we needed their help to interpret the failure data and verify the conclusions of our anomaly detectors; but in general, dealing with false positives may require operator intervention, since the operator(s) may be best qualified to determine whether an anomaly, whether transient or long-lived, is a true problem or a false alarm. Figure 8 illustrates the tradeoff between early detection and false positives: the introduction of a new and bug-free “Father’s Day” page to the site caused both NB/PWL and NB/UWL to declare an anomaly; NB/PWL took 9 hours to decide that this new page was not problematic; NB/UWL reached this conclusion in only 90 minutes; and  $\chi^2$  did not detect an anomaly at

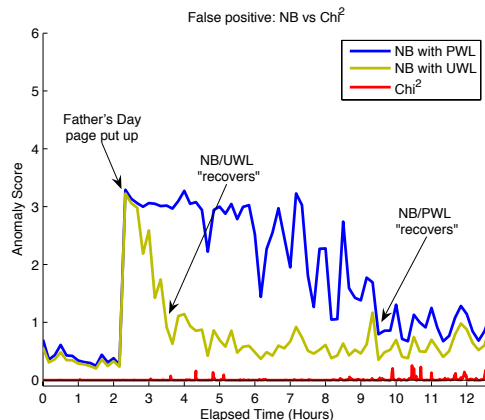


**Figure 8. Illustration of a case where the NB algorithms detect a false positive (due to introduction of a new page) but  $\chi^2$  does not.**

all. Similarly, an anomaly we detected several hours before the anomalous pages caused a site crash might be dismissed by the operator since at the time Ebates had just sent emails to all its customers, stimulating increased site activity; but if anomalous behavior persisted, the operator might realize that the localization information could help drill down on the problem and determine if there was really cause for concern.

### 5.2. Detecting Different Types of Anomalies

Naive Bayes and  $\chi^2$  respond to different kinds of changes in traffic patterns and are useful for complementary tasks. Naive Bayes is sensitive to *increases* in frequency to *infrequent* pages. Consider a page that normally accounts for only 0.1% of hits to the site with variance 0.01%: since Naive Bayes models this page’s contribution as normally-distributed, an increase in that page to, say, 5% of page hits is modeled as extremely improbable. This sensitivity to infrequent-page increases makes NB an effective diagnostic tool for datasets such as ours, in which many failures were related to bugs in relatively infrequently-accessed pages.

In contrast, the  $\chi^2$  test is robust to changes in hit counts to unpopular pages, in part because the validity of the test requires excluding any page not receiving at least five hits in a given time interval. This results in  $\chi^2$  being more sensitive to increases and decreases in *frequent* pages, but less useful for precise localization: its bias toward frequently-accessed pages often caused it to report those pages as the most anomalous, but that is not useful since frequently-accessed pages are generally going to be affected at some point by most failures anyway. For this reason, the sum-

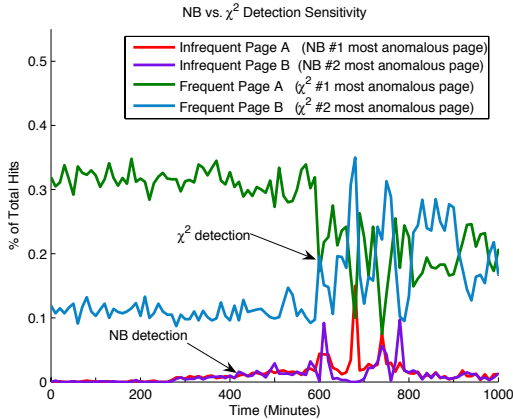

**Figure 9. Illustration of differences in detection sensitivity of NB PWL and  $\chi^2$ . NB PWL is more sensitive to increases in hits to infrequent pages, which makes it able to detect changes earlier and seems to make it a better localizer.  $\chi^2$  is more sensitive to changes to hits to more frequent pages, making it less prone to false positives.**

mary of per-dataset results reported in Table 2 rely on  $\chi^2$  for detection and Naive Bayes with probabilistically-weighted learning (NB/PWL) for localization.

The difference in behavior between the techniques can be seen in Figure 9, which is for data set 4. NB is able to detect this anomaly 3 hours before  $\chi^2$ , because it detects an increase in hits to very infrequent pages. These pages continue to increase in frequency, and 3 hours later they end up having a major deleterious effect on the site. This causes changes in hits to highly frequent pages, which  $\chi^2$  then detects. Thus, the determination of which algorithm detected the anomaly tells the operator something about the *nature* of the anomaly, and with experience, an operator could learn to recognize “patterns” such as this one, in which detection by one algorithm is later followed by detection by another. Again, our contribution is the pervasive use of visualization to take advantage of the operator’s experience with and understanding of the system as well as her ability to rapidly absorb visually-presented information.

### 5.3. Reconstructing the Ground Truth

To precisely compute the accuracy, advance warning time, and false positive/false negative rates of our techniques, we needed to know the “ground truth” of exactly what problems occurred, when they were introduced, and when they were detected. Reconstructing this information required the cooperation of the operations staff, who even after going through system monitor logs, email archives,

and chat logs could only partially reconstruct some of the incidents. We still don’t know the precise time some failures were introduced (only when they were detected by Ebates staff), and we still cannot determine whether three of the anomalies we detected really corresponded to a transient (but undetected) site problem or were false positives. This in turn can make it difficult to determine whether an anomaly detected prior to an actual failure was an early warning signal or an unrelated false alarm. We believe that this is an inherent problem of working with real-world failure data.

## 6. Related Work

Web Usage Mining (as described in [13], for example) is a large and active field. These techniques have been applied to a variety of areas, but we believe we are the first to explore their use in application failure detection and diagnosis. Kallepalli and Tian [9] employ a form of hidden Markov Models to learn user behavior from web logs, but their focus is on building an effective test suite rather than real-time problem detection and localization. Commercial products for monitoring applications and their software and hardware platforms, such as IBM Tivoli [8], HP OpenView [7], and Altaworks Panorama [1], focus on system and internal application metrics rather than changes in user behavior to discover failures.

Pinpoint [3, 11] employs anomaly detection methods for problem detection and root-cause analysis in distributed applications. While their approach involves instrumenting the application and/or middleware to discover patterns in application component dependencies, our approach uses only generic HTTP logs and treats the structure of the application as a black box.

Cohen et al. [5] have applied an augmented type of Bayesian network to the problem of metric attribution: which low-level system properties (CPU load, swap activity, etc.) are most correlated with high-level behaviors such as performance problems? Like us, they selected a Bayesian network because its property of interpretability allows the network to be used for localization.

## 7. Future Work

Ebates has expressed interest in deploying our visualization tools on live data and in working with us to develop a better “ground truth” for evaluation. However, our experience suggests that a 100% accurate ground truth might be unrealistic, so we are in the process of obtaining similar data sets from two other companies to repeat our experiments.

We want to incorporate real-time feedback from the operator into our models and produce more informed warnings. For example, if the current long-term anomaly represents a normal behavior, the operator should be able to spec-

ify that this is actually *the new normal behavior*. Also, if the recent anomaly represented a normal behavior (e.g., page update), we shouldn't report a warning the next time a *similar* anomaly appears.

## 8. Conclusion

Notwithstanding the promise of statistical analysis techniques for detecting and localizing Internet service failures, the judgment of experienced operators can help disambiguate conflicting warnings, resolve apparently spurious warnings, and interpret problems flagged by such algorithms. We showed that visualization combined with anomaly detection and localization can help human operators bring their expertise and experience more efficiently to bear on such problems, reducing detection time, diagnostic effort, and the cost of classifying false positives.

In particular we detected anomalies in user traffic to a real mid-sized Internet site using Naive Bayes and the  $\chi^2$ -test. Our techniques detected most of the failures more quickly than the site's staff, and the visualization helped to understand the types and sources of anomalies reported by the algorithms.

We believe there is a critical synergy between visualization and automatic detection from the perspective of the autonomic computing. Many traditional visualization tools are based on the organization of the system. In contrast, our tools present information in a format that is useful to operators, helping them monitor their system and allowing them to rapidly decide whether the visualization tool works and is helpful. From that foundation of trust, we then automatically point to behaviors at certain times that we think are suspicious using that same visualization format. The operators can then quickly decide whether or not these warnings are useful.

Without a visualization tool, we believe it would have taken scores of warnings for each operator to decide whether or not he or she trusted the tool. Since the detector and visualizer use the same metric, it makes it much easier and faster for the operator to decide whether the warning is a false positive. Since checking is quick, we may be able to afford a higher false positive rate in practice.

## Acknowledgments

We would like to thank Mike Chen, Mark Verber, and Emre Kıcıman for their valuable insights and help with this paper. We also thank Alessandro Isolani, CEO of Ebates, for allowing us to use sanitized web log data. We would like to acknowledge the work of Kayur Patel, Gilman Tolle, and Jon Hui, who did similar work on the same Ebates data sets

concurrently, getting useful results and coming to many of the same conclusions we did.

## References

- [1] Altaworks, Altaworks Panorama. <http://www.altaworks.com/solutionsPanorama.htm>.
- [2] S. K. Card, J. D. Mackinlay, and B. Shneiderman. *Readings in Information Visualization: Using Vision To Think*. Morgan Kaufmann, San Francisco, CA, 1999.
- [3] M. Chen, E. Kıcıman, E. Fratkin, A. Fox, and E. Brewer. Pinpoint: Problem determination in large, dynamic internet services. DSN 2002.
- [4] M. Y. Chen, A. Accardi, E. Kıcıman, D. Patterson, A. Fox, and E. A. Brewer. Path-based failure and evolution management. In *NSDI*, pages 309–322, 2004.
- [5] I. Cohen, J. S. Chase, M. Goldszmidt, T. Kelly, and J. Symons. Correlating instrumentation data to system states: A building block for automated diagnosis and control. In *6th USENIX Symposium on Operating Systems Design and Implementation*, San Francisco, CA, Dec 2004.
- [6] E. Eskin. Anomaly detection over noisy data using learned probability distributions. In *Proceedings of the International Conference on Machine Learning*, pages 255–262, 2000.
- [7] Hewlett Packard Corporation, HP OpenView Software. <http://www.openview.hp.com>.
- [8] IBM Corporation, IBM Tivoli Software. <http://www.ibm.com/software/tivoli>.
- [9] C. Kallepalli and J. Tian. Measuring and modeling usage and reliability for statistical web testing. *IEEE Transactions on Software Engineering*, 27:1023–1036, 2001.
- [10] J. O. Kephart and D. M. Chess. The vision of autonomic computing. *IEEE Computer*, 36(1):41–50, 2003.
- [11] E. Kıcıman and A. Fox. Detecting application-level failures in component-based internet services. Technical report, Stanford, 2004.
- [12] G. W. Snedecor and W. G. Cochran. *Statistical methods*. Eighth Edition, Iowa State University Press, 1989.
- [13] J. Srivastava, R. Cooley, M. Deshpande, and P.-N. Tan. Web usage mining: Discovery and applications of usage patterns from web data. *SIGKDD Explorations*, 1:12–23, 2000.
- [14] N. Ye, Q. Chen, S. M. Emran, and K. Noh. Chi-square statistical profiling for anomaly detection. In *IEEE Systems, Man, and Cybernetics Information Assurance and Security Workshop June 6-7, 2000 at West Point, New York*, pages 187–193, June 2000.